

Request No: Date:

Company Name:


Contact Name:

Alunet Sales Rep:

OPENING DIMENSIONS:

Frame height:

H: mm

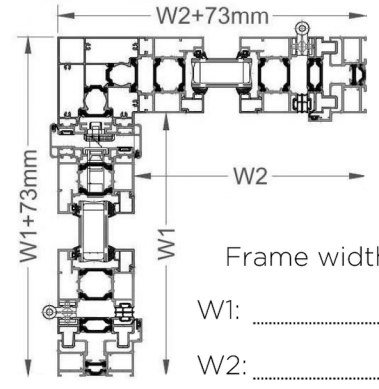


Frame width:


W1: mm

W2: mm


TRACK OPTIONS (circle option)

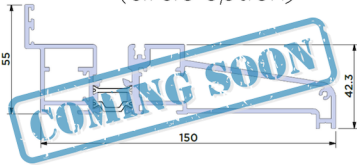


Integrated 150mm Cill & Threshold
BF73.0103 & BF73.0111

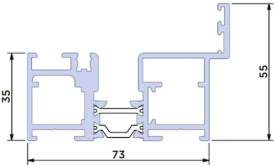


Standard Threshold
BF73.0101

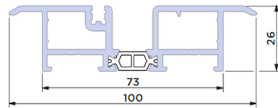

Low Threshold with
Ramp BF73.0204




Low Threshold
BF73.0103




Low Threshold
BF73.0103 &
BF73.0806


SUB CILL OPTIONS (circle option)

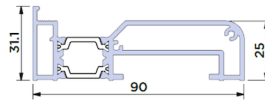

90mm Cill BF73.0402



150mm Cill BF73.0405



190mm Cill BF73.0403




230mm Cill BF73.0404


No Cill

JAMB OPTIONS (circle option)

Adjustable Jamb







Standard Jamb



OPENING:
(circle option)

IN

OUT

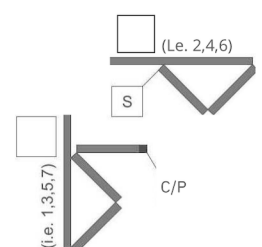

NOTE: These configurations have risk of corner post interference with outer frame rebates.

NOTES